


2001 Ford Mustang V6-3.8L VIN 4
Vehicle > Technical Service Bulletins

CAMPAIGN - IMRC SET SCREW INSPECTION/REPAIR

Related Links

Service Procedure

1. **NOTE:** The IMRC valve will reset itself when the vehicle is started.

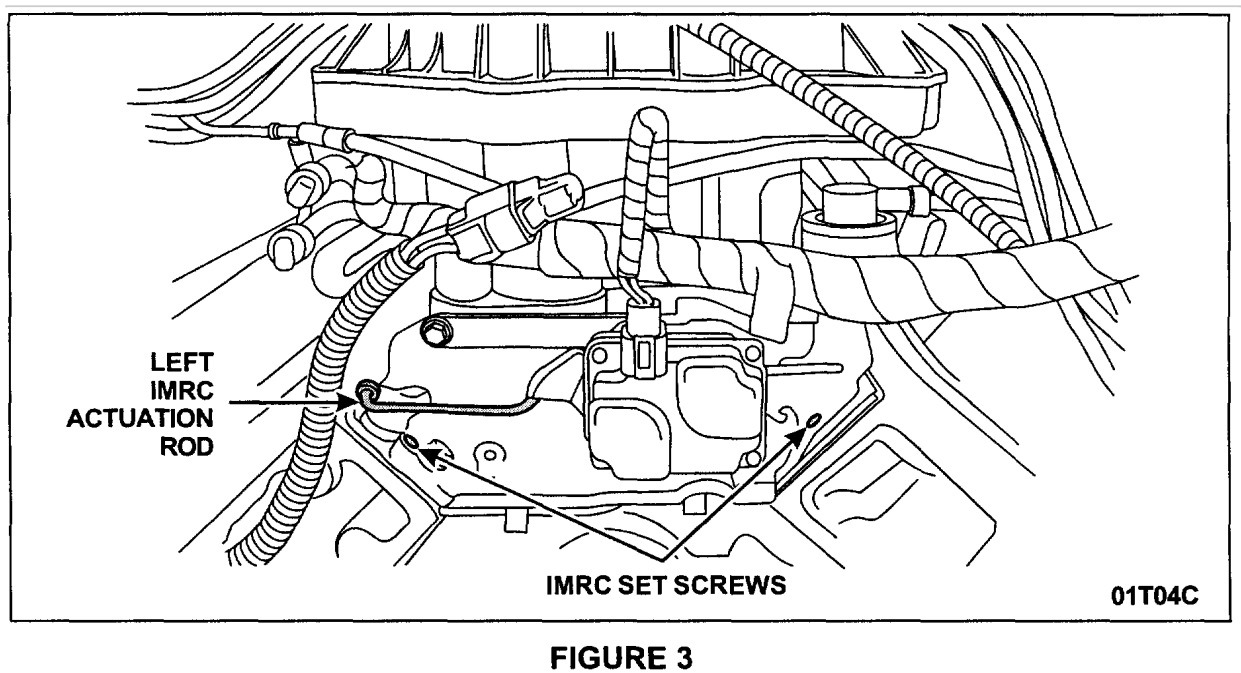

Manually open the IMRC valve by grasping the left IMRC actuation rod and pulling it toward the driver side of the vehicle. See Figure 3.

2. Apply enough of the thread lock agent to completely cover each of the two (2) IMRC set screws. See Figure 3.
3. Install the engine cover and the passenger side lower I/P cover.
4. Allow the threadlock agent to cure for 30 minutes before starting the vehicle.