




**LRS-MILO2**  
**1996-04 M.I.L. Eliminators**  
**Instruction Sheet**



1. Disconnect battery.
2. Raise vehicle. (Be sure to secure with jack stands.)
3. Unplug secondary O2 sensors. (Closest to rear of car.)
4. Pry plugs from bracket.
5. It may be necessary to grind or cut alignment tabs from passenger side O2 sensor connector. (Picture shown below.)
6. Plug in MIL eliminators making sure they are fully engaged, then tie wrap them away from your exhaust.
7. Reconnect battery.

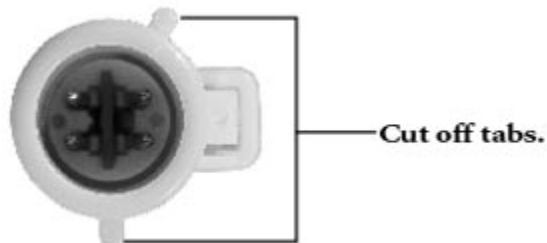

**1-866-507-3786**

© 2004 Latemodel Restoration Supply, Inc. All Rights Reserved.