

CORBEAU®

Corbeau EXT-4 Extender Bars



Corbeau USA, LLC provides the following mounting bracket installation information as a general set of instructions to help you properly install your Corbeau Seats and Brackets. These instructions are not all-inclusive and may not cover every aspect of installation as some applications may require extra parts or interior modifications. Please contact Corbeau USA, LLC or your local authorized dealer if you have installation questions. We assume no responsibility for proper or improper installation. No warranty or representation is made as to this product's ability to protect the user from injury or death. The user assumes that risk. The effectiveness, warranty and longevity of this product are directly related to the manner in which it is installed used and/or maintained.

Overview

Extender bars are designed to offset the mounting location of seat sliders. The mounting orientation of extender bars will offset the seat sliders 4 inches forward or backward from the standard mounting location. Mounting extender bars in the forward position is suggested for shorter occupants which will relocate the positioning of the seat sliders towards the front of the vehicle. Mounting extender bars in the backward position is suggested for taller occupants which will relocate the positioning of the seat sliders towards the rear of the vehicle.

Installation Guidelines

1. Remove the Corbeau seat and bracket from the vehicle.
2. Keeping the seat sliders attached to the seat, separate the seat sliders from the bracket keeping the hardware as some of it will be re-used in step 5. Slide the seat all the way forward to access the rear two bolts and all the way backward for the front two bolts.
3. For taller occupants who require more legroom, refer to picture A for extender bar mounting orientation. For shorter occupants who require less legroom, refer to picture B. Note: The square spacers on extender bars are always mounted in the upright position.
4. Using the supplied hardware, mount the extender bars to the seat bracket utilizing the holes the seat sliders were mounted to; tighten securely.
5. Using the supplied longer bolts and the existing nuts and washers from your sliders, install the seat sliders to the extender bars; tighten securely. Sliders are to be mounted to the holes centered in the square spacers.
6. Re-install the entire assembly into the vehicle; tighten securely.

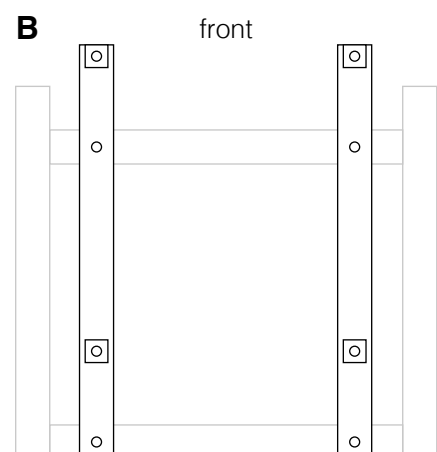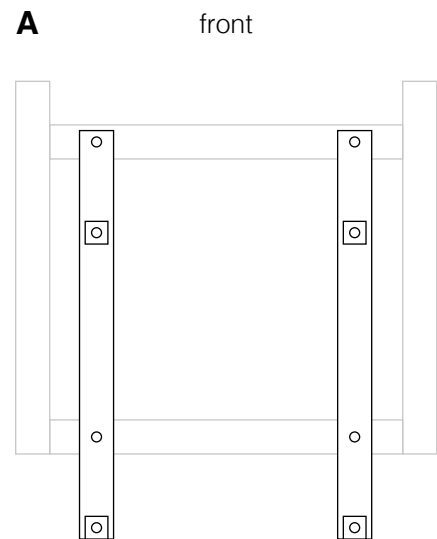

Corbeau USA, LLC

Phone: (801) 255-3737

Email: info@corbeau.com