

# 2018 Mustang 5.0L Performance PAC1

Installation Instructions  
P/N: 422113 (131850-PERFPK1)



**ROUSH**  
PERFORMANCE

39555 Schoolcraft Rd, Plymouth MI, 48170 | 800.59.ROUSH

# 2018 Mustang 5.0L Performance PAC1

## Installation Instructions

P/N: 422113 (131850-PERFPK1)

**Application:** 2018 Ford Mustang 5.0L Manual or Automatic Transmission

**Important Note:**

Before installing the ROUSH Performance Product, please read through the installation procedure and verify that all items are present. If you are missing hardware or have any questions, please contact ROUSH Performance at 1-800-59-ROUSH, 9:00 AM to 5:00 PM EST.

**TABLE OF CONTENTS**

Packing List for 2018 Mustang 5.0L Performance PAC1 .....	3
Equipment and Supplies Required.....	3
Limit of Liability Statement.....	4
Safety Precautions .....	4
Work Safely! .....	4
Section A – Removal .....	5
Section B – Installation.....	8
Section C – PCM Flashing .....	11

**PACKING LIST FOR 2018 MUSTANG 5.0L PERFORMANCE PAC1**

Description	Part Number	Quantity
2018 5.0L MUSTANG CAK	131850-9600	1
Lower Air Box Tray	131550-9A612	1
Upper Airbox Cover Assembly	1318-9643HC	1
MAF Tube - 5.0	131550-12B579	1
MAF Insert - 98 mm	131850-9G899	1
Dirty Air Duct	1315-9F763	1
Tube Assembly, Clean Air with Fittings	131850-9B659	1
Filter with Clamp - red	131550-9601R	1
Installation Insert - ROUSH	1315-P1INST	1
Hardware Kit - AIS	131850-CAKHWK	1
Bolt - MAF Tube to Airbox (M8 x 1.25 x 25)	W500224-S437	2
Grommet - Boom Tube Delete	W651016	1
Screw, Self-Tapping M6 X 25 mm	W506976-S437	6
Mustang Flash Pack	1318-FLASHPK	1
Mustang Performance Pac Calibration Card	P1318-PP-AA	1
Sticker - White ROUSH	ROUSH-STKR-7x1.25	2
Optional Warranty	336PTW	1

**EQUIPMENT AND SUPPLIES REQUIRED**

- 10 mm Socket
- Pliers
- Flat-head Screwdriver
- Trim Tool
- Torx Screwdriver

**If you are missing any items, please call us toll free at 1-800-59-ROUSH.**

**LIMIT OF LIABILITY STATEMENT**

The information contained in this publication was accurate and in effect at the time the publication was approved for printing and is subject to change without notice or liability. ROUSH Performance Products (RPP) reserves the right to revise the information presented herein or to discontinue the production of parts described at any time.

## SAFETY PRECAUTIONS



### **CAREFULLY READ THE IMPORTANT SAFETY PRECAUTIONS and WARNINGS BEFORE PROCEEDING WITH THE INSTALLATION!**

Appropriate disassembly, assembly methods and procedures are essential to ensure the personal safety of the individual performing the kit installation. Improper installation due to the failure to correctly follow these instructions could cause personal injury or death. Read each step of the installation manual carefully before starting the installation.

- Always wear safety glasses for eye protection.
- Place ignition switch in the OFF position.
- Always apply the parking brake when working on a vehicle.
- Block the front and rear tire surface to prevent unexpected vehicle movement.
- If working with a lift, always consult vehicle manual for correct lifting specifications.
- Operate the engine only in well-ventilated areas to avoid exposure to carbon monoxide.
- Do not smoke or use flammable items near or around the fuel system.
- Use chemicals and cleaners in well-ventilated areas.
- Batteries produce explosive gases, which can cause personal injury. Therefore, do not allow flames, sparks or flammable substances to come near the battery.
- Keep hands and any other objects away from the radiator fan blades.
- Keep yourself and your clothing away from moving parts when the engine is running.
- Do not wear loose clothing or jewelry that can get caught in rotating parts or scratch surface finishes.
- Allow the engine, cooling system, brakes and exhaust to cool before working on a vehicle.

### **WORK SAFELY!**

Perform this installation on a good clean level surface for maximum safety and with the engine turned off.



## SECTION A – REMOVAL

The following section will guide you through the removal of the stock components. Special care should be taken to label fasteners and parts that are taken off during this procedure since many will be reused.

1. Cover both fenders with fender covers to protect the vehicle finish.
2. Disconnect the battery ground cable.
3. Remove the strut brace if equipped.



4. Remove the plastic caps exposing the fasteners holding the cover down. Unbolt the cover and pull up to remove it from the grommets.




5. Disconnect the MAF sensor connector.



6. Loosen the clamp at the air box from the intake tube.



7. Release the two (2) latches holding the box lid to the lower box.

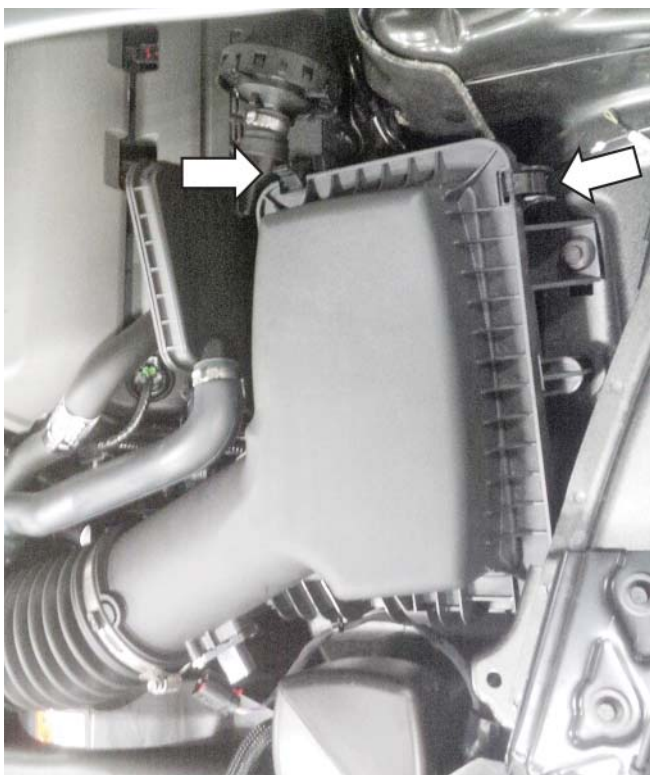


8. Remove the air box lid and filter. Retain the lid for use during installation.



9. Using the 10 mm socket, remove the bolt holding the air box to the inner fender. Retain the bolt as it will be used during installation.




10. Remove the air box tray and dirty air inlet from the vehicle.

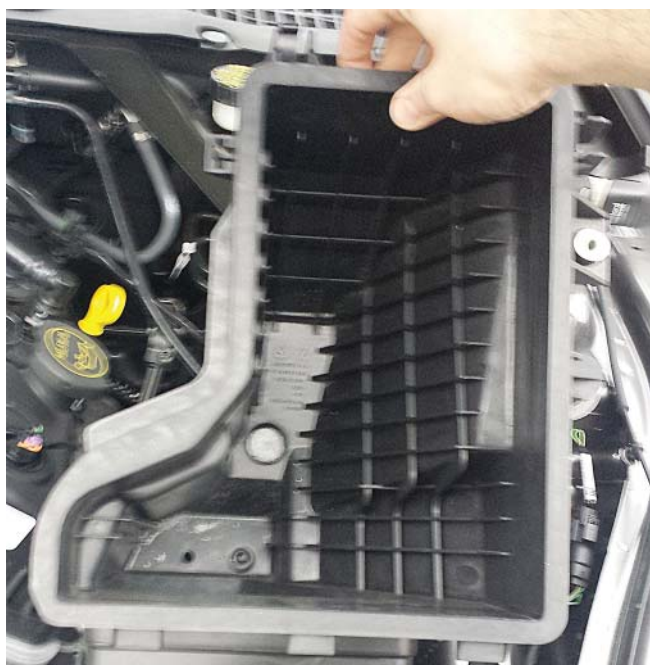

11. Remove the three (3) clips shown on the inner fender to give the slack needed in the wiring harness.



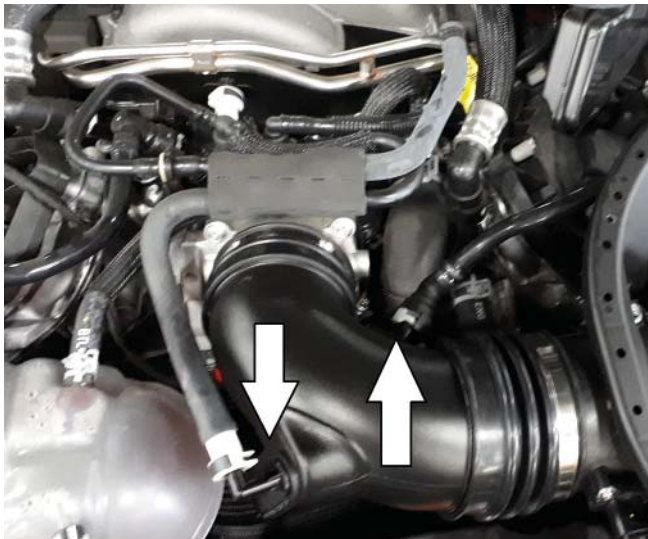

12. Remove the hose clamp and two (2) quick connect fittings from the clean air tube.




13. Using a 10 mm wrench or deep-well socket, remove the nut retaining the induction resonance tube to the firewall behind the driver side cylinder head.



14. Using a trim tool, pry up on the push pin retaining the induction resonance tube and remove the tube from the vehicle.



15. Remove the steel bushing followed by the two (2) rubber grommet from the stock air box tray. Retain these for use during installation.

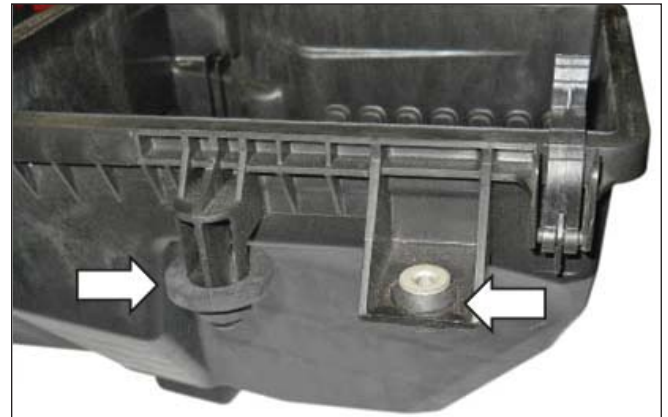

16. Remove the rubber isolator from the bottom of the stock air box tray and retain for use during installation.





**SECTION B – INSTALLATION**

1. Install the resonance tube delete grommet (P/N: W651016) into the firewall.



2. Install the grommet and sleeve that was removed from the stock air box into the ROUSH air box (P/N: 131550-9A612). **TIP:** Install the rubber grommet first, then install the steel bushing.



3. Install the second grommet onto the air box (P/N: 131550-9A612).



4. Install the rubber isolator into the bottom of the air box (P/N: 131550-9A612).



5. Insert the dirty air inlet (P/N: 1315-9F763-A) into the air box (P/N: 131550-9A612).



6. Insert the air box assembly into the vehicle.



7. Using a 10 mm socket and the bolt removed from the stock air box, attach the air box to the vehicle. Torque to 8 Nm.



8. Loosely attach the air filter (P/N: 131550-9601R) to the filter tube, leave the clamp loose so you can hide it once installed on the vehicle. Make sure the arrow on the filter is 90 degrees to the MAF sensor boss as shown.



9. Slide the filter tube assembly into the air box (P/N: 131550-9A612), making sure the sensor boss is pointed toward the front of the vehicle. Using a 10 mm socket, install the two (2) bolts (P/N: W500224). Torque to 10 Nm. Rotate the air filter clamp to a suitable location and torque to 3 Nm.






10. Install the clean air tube assembly (P/N: 131850-9B659) onto the throttle body first and then the filter tube. Tighten the clamps to 3 Nm.



11. Reconnect the two (2) hoses with quick connect fittings to the mating push-on barbs.

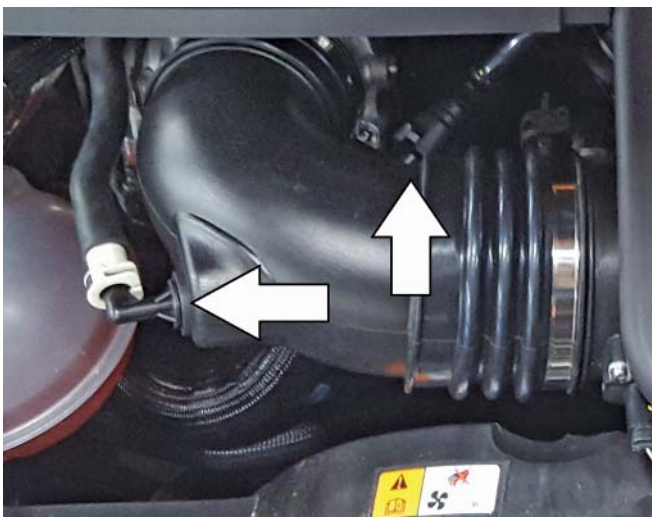

12. Remove the MAF sensor from the factory air box by removing the two (2) T-15 torx screws.



13. Re-install the MAF sensor into the ROUSH filter tube (P/N: 131550-12B579). Reattach the connector. Torque screws to 2 Nm.



14. Install the lid onto the airbox assembly (P/N: 1318-9643HC). Use six (6) self tapping screws (P/N: W506976-S437) to secure the lid.





15. Use template on the back page to trim the engine cover. (Use the measurement on the diameter to verify template sizing.)



16. Re-install the engine cover and strut tower brace. Torque to engine cover to 10 Nm and the strut brace to 55 Nm.

### SECTION C – PCM FLASHING

Proceed with steps 1 and 2 if you have a SAE J2534 pass through device (e.g. Puma, VCM I, VCM II).

If you do not have a SAE J2534 device, visit your local ROUSH Dealer or Performance Shop with the appropriate tools for PCM Calibration.

1. If equipped with a SAE J2534 pass through device, refer to the RDT-CALIM manual found on our website. <http://rdt.roush.com> The RDT-CALIM manual will guide you through the ROUSH Diagnostic Tool (RDT) software installation process and the ROUSH PCM flashing procedure detailed in RDT-CALIM.
2. Once the PCM has been successfully recalibrated, start the engine and check for unusual noises, dash service lights, and unusual operation. If problems are detected, immediately stop the engine or vehicle, diagnose and repair the problem.

